


Skirtboard Rubber

Your economical solution for heavyweight conveyor belting systems

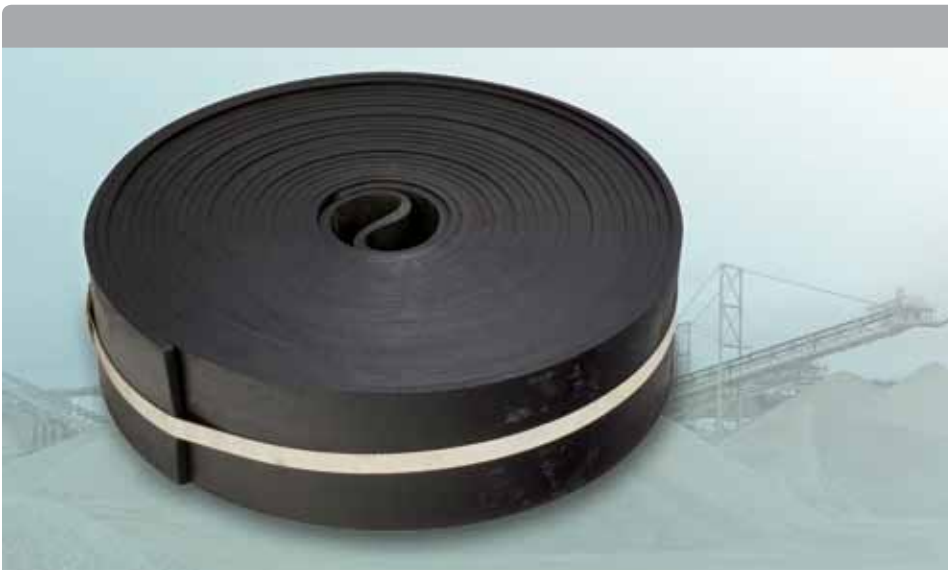

MINING INDUSTRY

Protect your conveyor belting systems from damaging fugitive materials and prevent spillage with the abrasion resistance and resilience of Fullchance Skirtboard Rubber.

Features and Benefits

- Resistant to abrasion
- Long wearing
- Stays stiff to reduce extra maintenance and cleanup
- Cannot de-laminate or separate under severe flexing and abrasion common to belt wiping service
- Available in a wide range of widths and gauges to meet the requirements of most conveying systems

Applications

- All conveyor loading
- Primary crushers
- Stackers
- Material containment

Specifications

Product: Black SBR Rubber
Minimum Tensile: 1000 PSI
Minimum Elongation: 350%
Shore Hardness: 60 +/- 5
Specific Gravity: 1.25 +/- 0.05
Roll Length: 50 feet

Made of durable SBR black rubber, Fullchance Skirtboard is used on conveyor handling systems to minimize product spillage at loading points and maintain dust control. Available in a wide range of widths and gauges, Fullchance Skirtboard Rubber is designed for use in all conveyor belt loading areas.